



3.4 Four-point contact ball bearings


d 15 – 65 mm



Basic design




SKF Explorer bearing



Bearing with locating slots


Principal dimensions			Basic load ratings		Fatigue load limit	Limiting speed	Mass	Designations	
d	D	B	C	C ₀	P _u			Bearing with locating slots ¹⁾	without locating slots
mm			kN		kN	r/min	kg	–	
15	35	11	12,7	8,3	0,355	36 000	0,062	QJ 202 N2MA	–
17	40	12	17	11,4	0,48	30 000	0,082	QJ 203 N2MA	–
	47	14	23,4	15	0,64	28 000	0,14	QJ 303 N2MA	–
20	52	15	32	21,6	0,93	24 000	0,18	QJ 304 N2MA	▶ QJ 304 MA
	52	15	32	21,6	0,93	24 000	0,18	QJ 304 N2PHAS	–
25	52	15	27	21,2	0,9	22 000	0,16	QJ 205 N2MA	–
	62	17	42,5	30	1,27	20 000	0,29	QJ 305 N2MA	QJ 305 MA
30	62	16	37,5	30,5	1,29	19 000	0,24	QJ 206 N2MA	▶ QJ 206 MA
	72	19	53	41,5	1,76	17 000	0,42	QJ 306 N2MA	▶ QJ 306 MA
	72	19	53	41,5	1,76	17 000	0,42	QJ 306 N2PHAS	–
35	72	17	49	41,5	1,76	17 000	0,35	QJ 207 N2MA	–
	80	21	64	51	2,16	15 000	0,57	QJ 307 N2MA	▶ QJ 307 MA
	80	21	64	51	2,16	15 000	0,57	QJ 307 N2PHAS	–
40	80	18	56	49	2,08	15 000	0,45	–	▶ QJ 208 MA
	90	23	78	64	2,7	14 000	0,78	QJ 308 N2MA	▶ QJ 308 MA
	90	23	78	64	2,7	14 000	0,78	QJ 308 N2PHAS	–
45	85	19	63	56	2,36	14 000	0,52	–	▶ QJ 209 MA
	100	25	100	83	3,55	12 000	1,05	QJ 309 N2MA	▶ QJ 309 MA
	100	25	100	83	3,55	12 000	1,05	QJ 309 N2PHAS	QJ 309 PHAS
50	90	20	65,5	61	2,6	13 000	0,59	–	▶ QJ 210 MA
	110	27	118	100	4,25	11 000	1,35	–	▶ QJ 310 MA
	110	27	118	100	4,25	11 000	1,35	–	QJ 310 PHAS
55	100	21	85	83	3,55	11 000	0,77	QJ 211 N2MA	▶ QJ 211 MA
	120	29	137	118	5	10 000	1,75	QJ 311 N2MA	▶ QJ 311 MA
60	110	22	96,5	93	4	10 000	0,99	QJ 212 N2PHAS	–
	110	22	96,5	93	4	10 000	0,99	QJ 212 N2MA	▶ QJ 212 MA
	130	31	156	137	5,85	9 000	2,15	QJ 312 N2MA	▶ QJ 312 MA
	130	31	156	137	5,85	9 000	2,15	–	▶ QJ 312 PHAS
65	120	23	110	112	4,75	9 500	1,2	QJ 213 N2PHAS	–
	120	23	110	112	4,75	9 500	1,2	QJ 213 N2MA	▶ QJ 213 MA
	140	33	176	156	6,55	8 500	2,7	QJ 313 N2PHAS	–
	140	33	176	156	6,55	8 500	2,7	–	▶ QJ 313 MA



Dimensions					Abutment and fillet dimensions			Calculation factor
d	d ₁ ≈	D ₁ ≈	r _{1,2} min.	a	d _a min.	D _a max.	r _a max.	A
mm					mm			—
15	22	28,1	0,6	18	19,2	30,8	0,6	0,000 257
17	23,5 27,7	32,5 36,3	0,6 1	20 22	21,2 22,6	35,8 41,4	0,6 1	0,000 427 0,00087
20	27,5 27,5	40,8 40,8	1,1 1,1	25 25	27 27	45 45	1 1	0,00143 0,00143
25	31,5 34	43 49	1 1,1	27 30	30,6 32	46,4 55	1 1	0,00126 0,00278
30	37,5 40,5 40,5	50,8 58,2 58,2	1 1,1 1,1	32 36 36	35,6 37 37	56 65 65	1 1 1	0,00256 0,00508 0,00508
35	44 46,2 46,2	59 64,3 64,3	1,1 1,5 1,5	37 40 40	42 44 44	65 71 71	1 1,5 1,5	0,00473 0,00744 0,00744
40	49,5 52 52	66 72,5 72,5	1,1 1,5 1,5	42 46 46	47 49 49	73 81 81	1 1,5 1,5	0,0066 0,0118 0,0118
45	54,5 58 58	72 81,2 81,2	1,1 1,5 1,5	46 51 51	52 54 54	78 91 91	1 1,5 1,5	0,00871 0,0202 0,0202
50	59,5 65 65	76,5 90 90	1,1 2 2	49 56 56	57 61 61	83 99 99	1 2 2	0,0103 0,029 0,029
55	66 70,5	84,7 97,8	1,5 2	54 61	64 66	91 109	1,5 2	0,0173 0,0404
60	72 72 77	93 93 106	1,5 1,5 2,1	60 60 67	69 69 72	101 101 118	1,5 1,5 2	0,0242 0,0242 0,0549
	77	106	2,1	67	72	118	2	0,0549
65	78,5 78,5 82,5	101 101 115	1,5 1,5 2,1	65 65 72	74 74 77	111 111 128	1,5 1,5 2	0,033 0,033 0,0731
	82,5	115	2,1	72	77	128	2	0,0731


3.4 Four-point contact ball bearings

d 70 – 150 mm

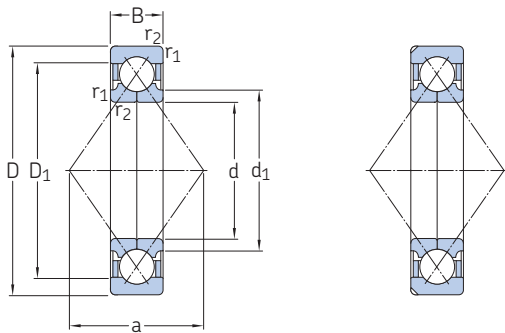

Bearing with locating slots


Principal dimensions			Basic load ratings		Fatigue load limit	Limiting speed	Mass	Designations	
d	D	B	C	C ₀	P _u			Bearing with locating slots ¹⁾	without locating slots
mm			kN		kN	r/min	kg	–	
70	125	24	120	122	5,2	9 000	1,3	► QJ 214 N2MA	QJ 214 MA
	125	24	120	122	5,2	9 000	1,3	QJ 214 N2PHAS	–
	150	35	200	180	7,35	8 000	3,15	QJ 314 N2MA	► QJ 314 MA
	150	35	200	180	7,35	8 000	3,15	QJ 314 N2PHAS	–
75	130	25	125	132	5,6	8 500	1,45	QJ 215 N2MA	► QJ 215 MA
	130	25	125	132	5,6	8 500	1,45	QJ 215 N2PHAS	–
	160	37	216	200	7,8	7 500	3,9	► QJ 315 N2MA	–
	160	37	216	200	7,8	7 500	3,9	QJ 315 N2PHAS	–
80	140	26	146	156	6,4	8 000	1,85	► QJ 216 N2MA	► QJ 216 MA
	170	39	232	228	8,65	7 000	4,6	► QJ 316 N2MA	–
	170	39	232	228	8,65	7 000	4,6	QJ 316 N2PHAS	–
85	150	28	156	173	6,7	7 500	2,25	► QJ 217 N2MA	► QJ 217 MA
	180	41	250	255	8,65	6 700	5,45	► QJ 317 N2MA	–
90	160	30	186	200	7,65	7 000	2,75	► QJ 218 N2MA	–
	190	43	285	305	11	6 300	6,45	► QJ 318 N2MA	–
	190	43	285	305	11	6 300	6,45	QJ 318 N2PHAS	–
95	170	32	212	232	8,5	6 700	3,35	► QJ 219 N2MA	–
	200	45	305	340	11,8	6 000	7,45	► QJ 319 N2MA	–
	200	45	305	340	11,8	6 000	7,45	QJ 319 N2PHAS	–
100	180	34	236	265	9,5	6 300	4,05	► QJ 220 N2MA	–
	215	47	345	400	13,7	5 600	9,3	► QJ 320 N2MA	–
110	200	38	280	325	11,2	5 600	5,6	► QJ 222 N2MA	–
	240	50	390	480	15,3	4 800	12,5	► QJ 322 N2MA	–
120	215	40	300	365	12	5 000	6,95	► QJ 224 N2MA	–
	260	55	415	530	16,3	4 500	16	► QJ 324 N2MA	–
130	230	40	310	400	12,7	4 800	7,75	► QJ 226 N2MA	–
	280	58	455	610	18	4 000	19,5	► QJ 326 N2MA	–
140	250	42	345	475	14,3	4 300	9,85	► QJ 228 N2MA	–
	300	62	500	695	20	3 800	24	► QJ 328 N2MA	–
150	270	45	400	570	16,6	4 000	12,5	► QJ 230 N2MA	–
	320	65	530	765	21,2	3 600	29	QJ 330 N2MA	–



Dimensions					Abutment and fillet dimensions			Calculation factor
d	d ₁ ≈	D ₁ ≈	r _{1,2} min.	a	d _a min.	D _a max.	r _a max.	A
mm					mm			—
70	83,5	106	1,5	68	79	116	1,5	0,04
	83,5	106	1,5	68	79	116	1,5	0,04
	89	123	2,1	77	82	138	2	0,0954
	89	123	2,1	77	82	138	2	0,0954
75	88,5	112	1,5	72	84	121	1,5	0,0453
	88,5	112	1,5	72	84	121	1,5	0,0453
	104	131	2,1	82	87	148	2	0,122
	104	131	2,1	82	87	148	2	0,122
80	95,3	120	2	77	91	130	2	0,0629
	111	139	2,1	88	92	158	2	0,155
	111	139	2,1	88	92	158	2	0,155
85	100	128	2	83	96	139	2	0,0768
	117	148	3	93	99	166	2,5	0,193
90	114	136	2	88	101	149	2	0,106
	124	156	3	98	104	176	2,5	0,26
	124	156	3	98	104	176	2,5	0,26
95	120	145	2,1	93	107	158	2	0,138
	131	165	3	103	109	186	2,5	0,317
	131	165	3	103	109	186	2,5	0,317
100	127	153	2,1	98	112	168	2	0,176
	139	176	3	110	114	201	2	0,442
110	141	169	2,1	109	122	188	2	0,277
	154	196	3	123	124	226	2,5	0,635
120	152	183	2,1	117	132	203	2	0,354
	169	211	3	133	134	246	2,5	0,785
130	165	195	3	126	144	216	2,5	0,411
	182	227	4	144	147	263	3	1,06
140	179	211	3	137	154	236	2,5	0,556
	196	244	4	154	158	282	3	1,4
150	194	226	3	147	164	256	2,5	0,793
	211	259	4	165	167	303	3	1,65

3.4 Four-point contact ball bearings

d 160 – 200 mm

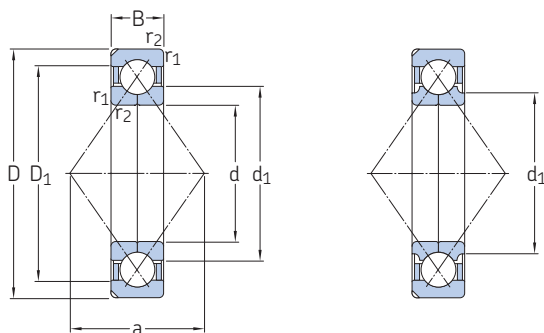

SKF Explorer bearing

Principal dimensions			Basic load ratings		Fatigue load limit	Limiting speed	Mass	Designations	
d	D	B	C	C ₀	P _u			Bearing with locating slots ¹⁾	without locating slots
mm			kN		kN	r/min	kg	–	
160	290	48	450	670	19	3 800	15,5	► QJ 232 N2MA	–
	340	68	570	880	23,6	3 400	34,5	► QJ 332 N2MA	–
170	310	52	455	720	20	3 400	19,5	► QJ 234 N2MA	–
	360	72	655	1 040	27	3 200	41,5	► QJ 334 N2MA	–
180	320	52	475	765	20,8	3 400	20,5	► QJ 236 N2MA	–
	380	75	680	1 100	28	3 000	47,5	QJ 336 N2MA	–
190	340	55	510	850	22,4	3 200	23,5	QJ 238 N2MA	–
	400	78	702	1 160	28,5	2 800	49	QJ 338 N2MA	–
200	360	58	540	915	23,2	3 000	28,5	QJ 240 N2MA	–